



## Specification

Product Code	2308PA-36	2308PA-24	2308PA-18	2308PA-9(0.5m)	2308P-48
LED Brand	CREE	CREE	CREE	CREE	EPISTAR
LED Quantity	36pcs	24pcs	18pcs	9pcs	48pcs
Rated Power	42W	28W	21W	11W	11W
Input Voltage	DC24V	DC36V/DC24V	DC24V	DC24V	DC24V
Frequency Range	/	/	/	/	/
Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60° (Tilted 10 degrees:15° 30° 45° 20X35° )				>120°
Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
Life	50000H	50000H	50000H	50000H	50000H
Protection Grade	IP67	IP67	IP67	IP67	IP67
Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

**INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANS**

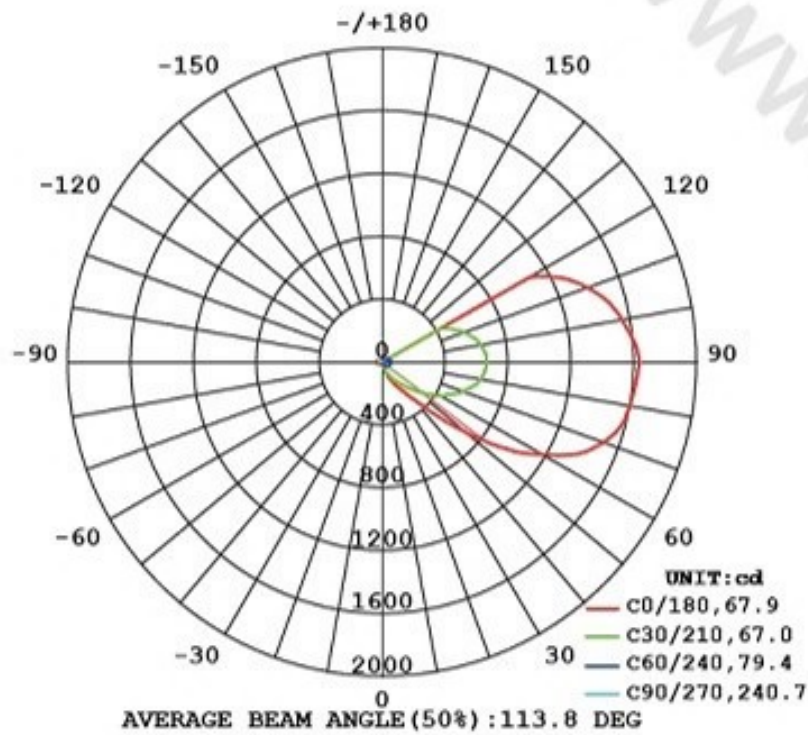




**ROAD SURFACE ISOCANDELA DIAGRAM**

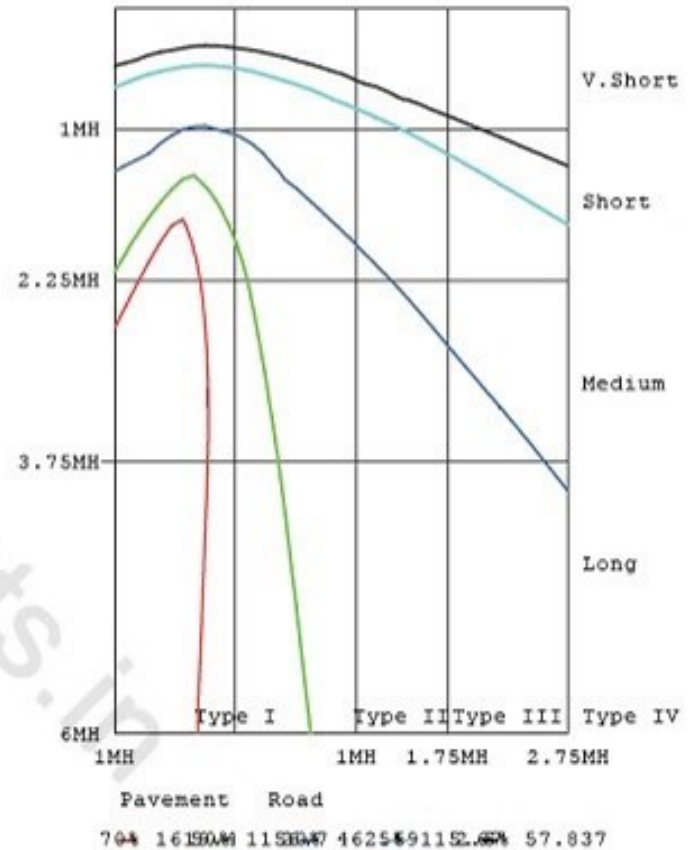

# Inground Light Series

2308P



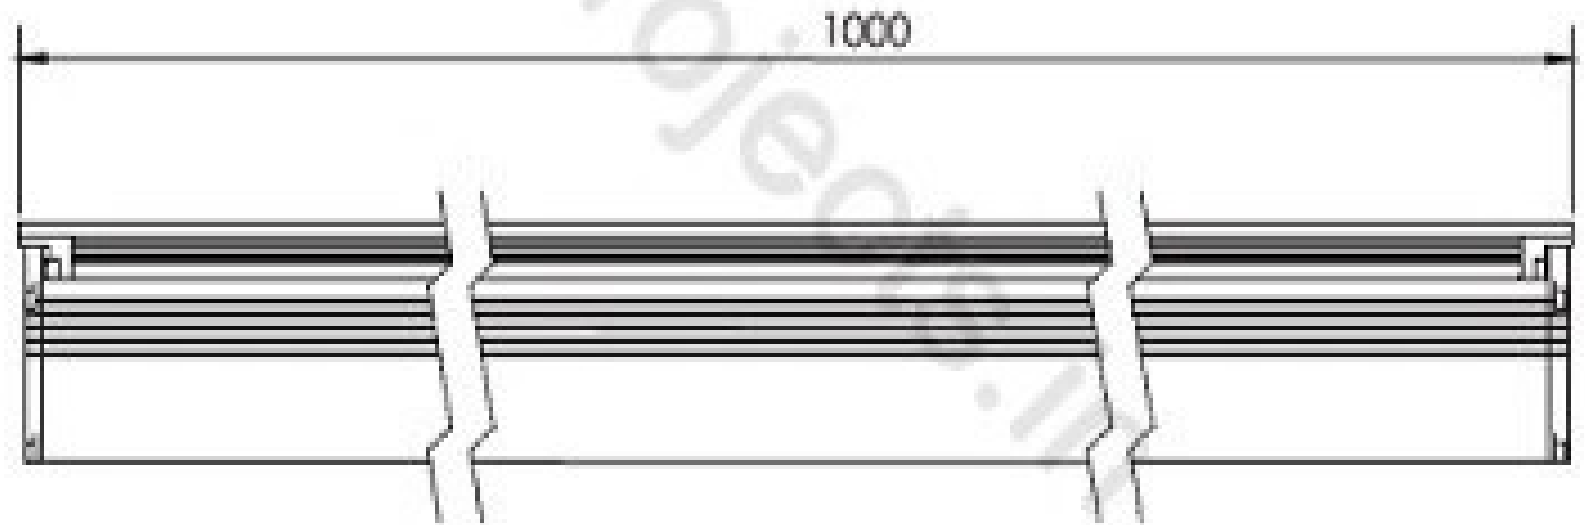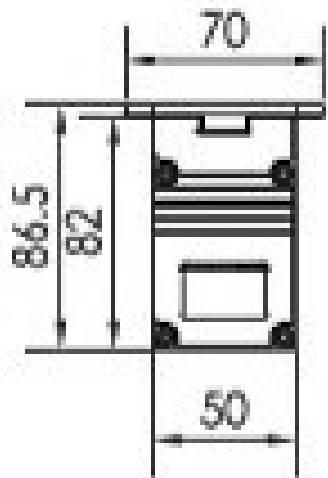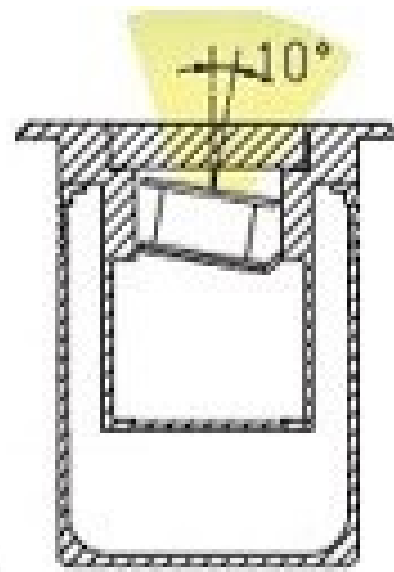

'Cut Size: L999\*W50\*H87mm