

LIGHT SOURCE COB
Led-Cree, Bridgelux, Osram
ATHD
< 10 %
CRI
CRI-80
POWER FACTOR P.F
>0.95
INGRESS PROTECTION
IP66
MOUNTING TYPE
Surface- Ground, Wall, Ceiling
HOUSING MATERIAL
Aluminum Die Cast-Tempered Glass
BODY FINISH
UV Powder Coated Black or Grey
LED LIFE TIME
50000 Hours
DRIVEN WITH
Constant Current Drivers
IMPACT RESISTANCE
IK8
OPERATING VOLTAGE
220v-240v
PHOTO-BIO SAFETY
RG-0 No risk factor.
WARRANTY
3 Years
BRAND
ARCPROJECTS





Flood Light Series

1271U



Specification

Product Code	1271UD-90	1271UC-90	1271UF-40
Led Brand	CREE/LUMILEDS	CREE/LUMILEDS	CREE RGBW 4 in 1
Led Quantity	90pcs	90pcs (24R 24G 24B 18W)	40pcs
Rated Power	300W	210W	360W
Input Voltage	AC100-305V	AC100-305V	AC100-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
Color	Single	RGBW/RGBA/Single	RGBW
Beam Angle	2.6° 3.5° 12° 20° 30° 60° 10X70° 5X20°		8° 25° 10X45°
Control Mode	CC	DMX512/RDM/CC	DMX512/RDM
Life	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66
Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
Ambient Humidity	10%~90%	10%~90%	10%~90%

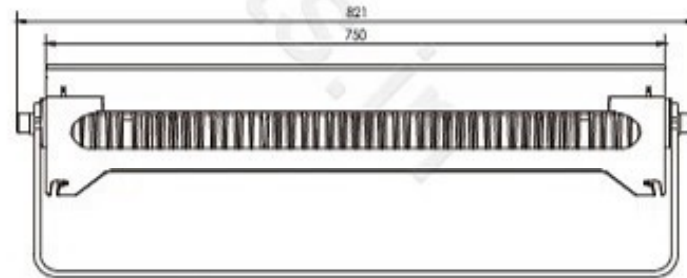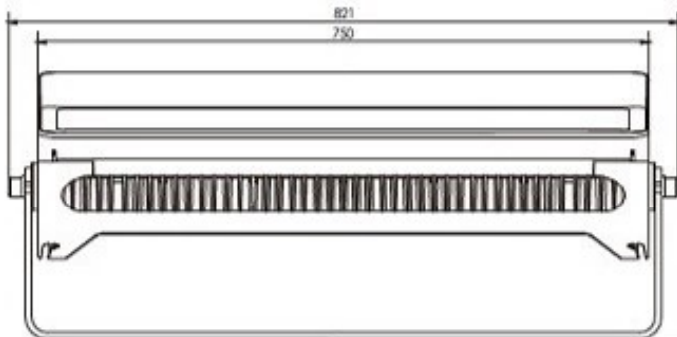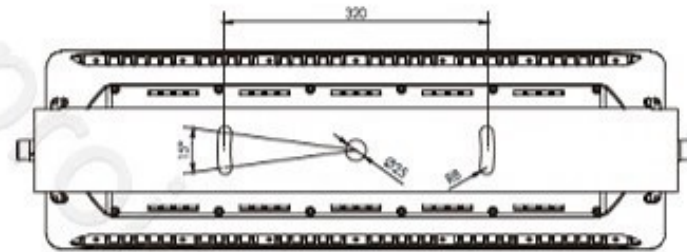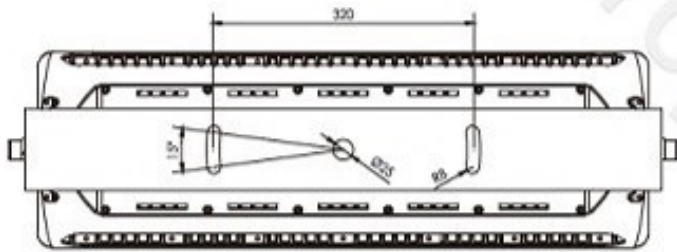

Flood Light Series

1271U





1271S

