


1127C



	SL1127CC-1	SL1
	CREE	CREE
	1pc	1pc
	3W	1.5W
	AC100-240V//DC24V	AC1
	50/60Hz	50/6
	Single	Single
	15° 28°	
	CC	CC
	50000H	5000
de	IP66	IP66
erature	- 25℃ ~ 50℃	- 25
dity	10% ~ 90%	10%


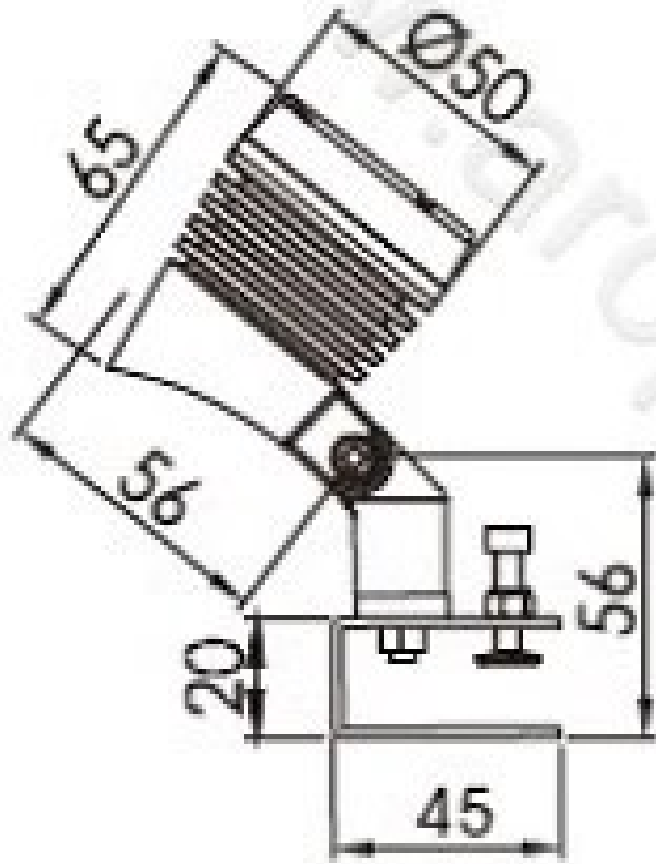


# Flood Light Series

1127F



	.1127FC-1	.1127FC-1
	CREE	CREE
	1pc	1pc
	3W	1.5W
	AC100-240V/DC24V	AC100-240V/DC24V
	50/60Hz	50/60Hz
	Single	Single
	15° 28°	
	CC	CC
	50000H	50000H
Grade	IP66	IP66
Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C
Humidity	10% ~ 90%	10% ~ 90%

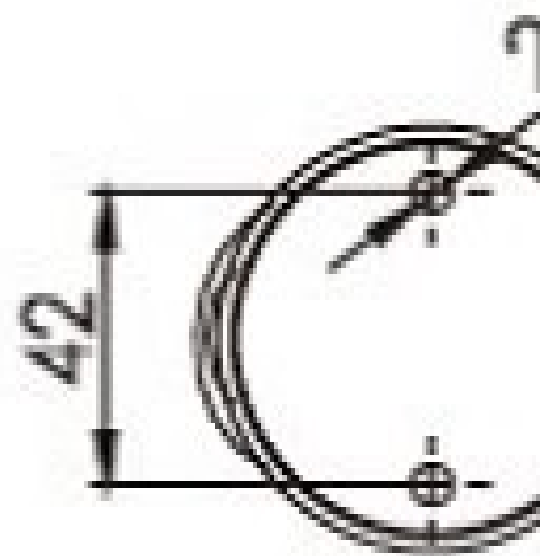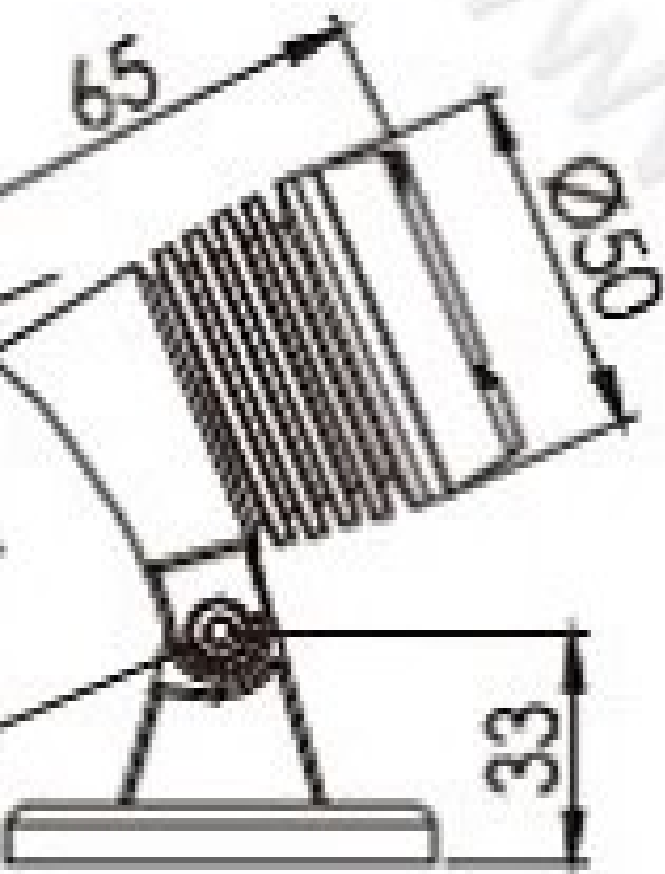

1127S



	.1127SC-1	1127SC-1
	CREE	CREE
	1pc	1pc
	3W	1.5W
	AC100-240V//DC24V	AC100-240V//DC24V
	50/60Hz	50/60Hz
	Single	Single
		15° 28°
	CC	CC
	50000H	50000H
Grade	IP66	IP66
Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C
Humidity	10% ~ 90%	10% ~ 90%



