

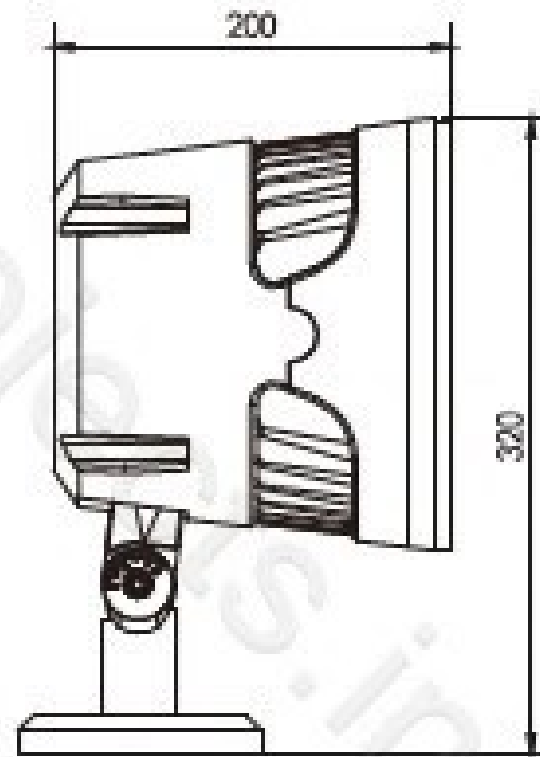


1102F

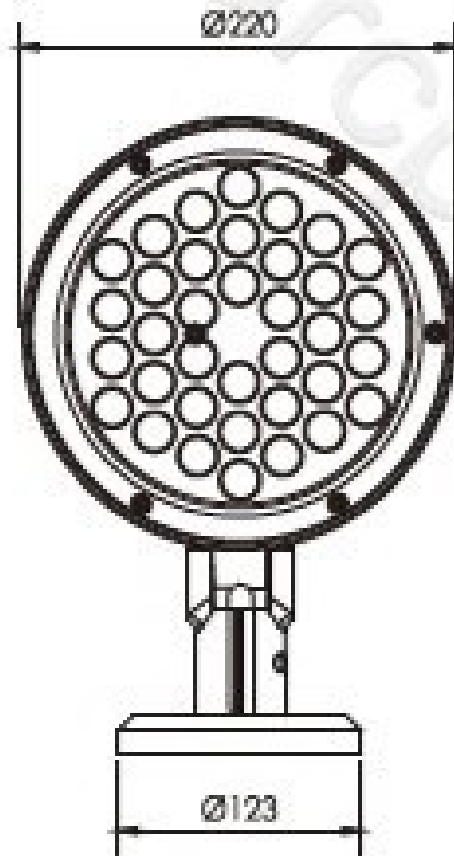



Specification

Product Code	1102FD-36	1102FC-36	1102FB-36	1102FC-24
Led Brand	CREE	CREE	CREE	CREE
Led Quantity	36pcs	36pcs	36pcs	24pcs
Rated Power	105W	86W	60W	50W
Input Voltage	AC100-240V	AC100-240V		AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	Single	Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			
Control Mode	CC	CC	CC	CC
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

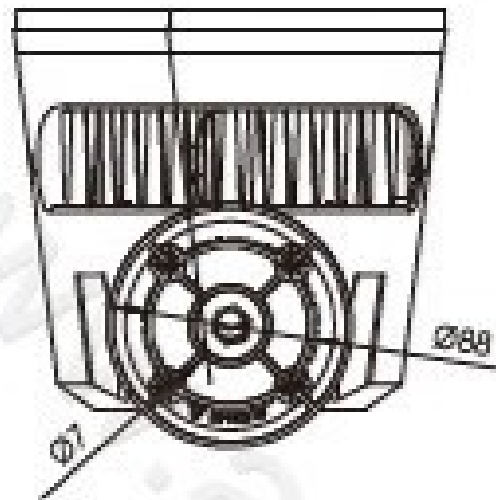





1102G

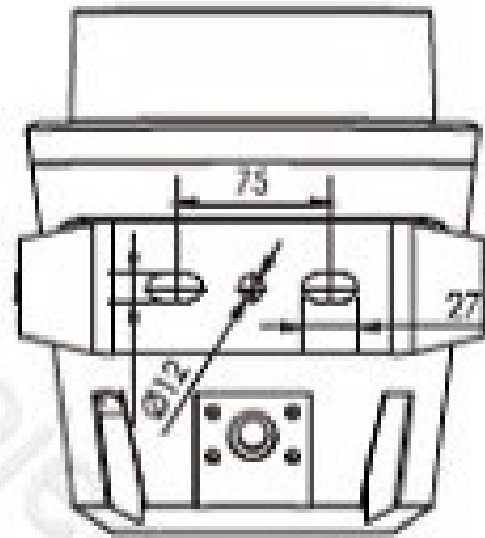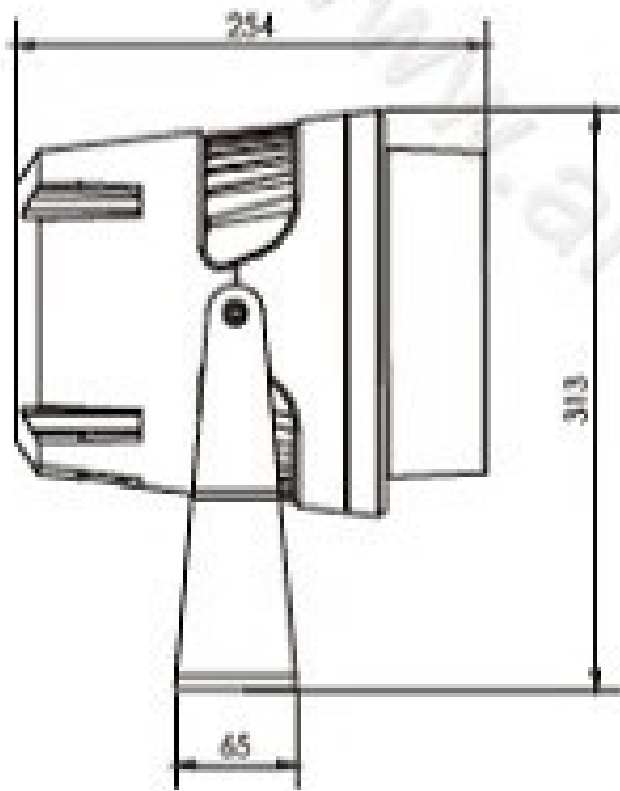





1102M

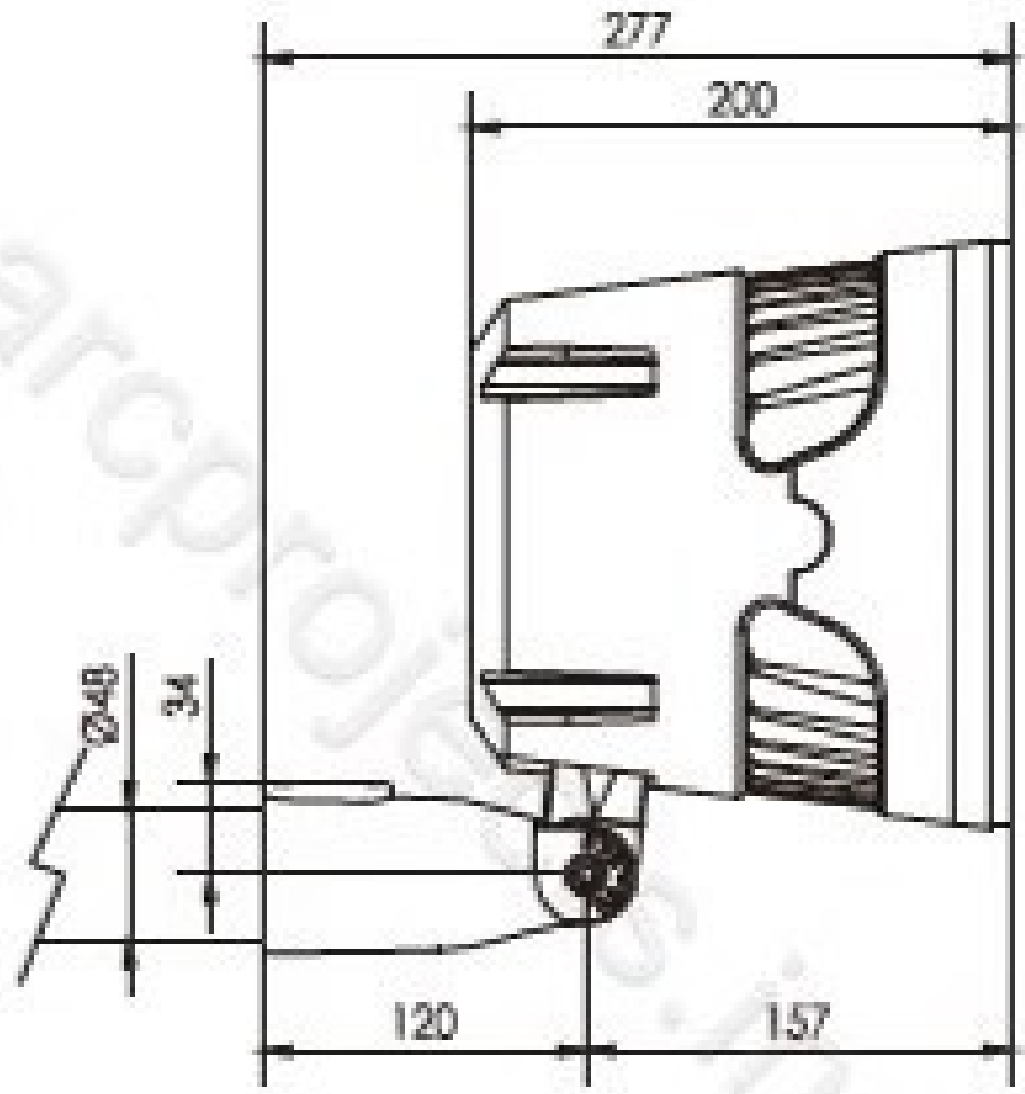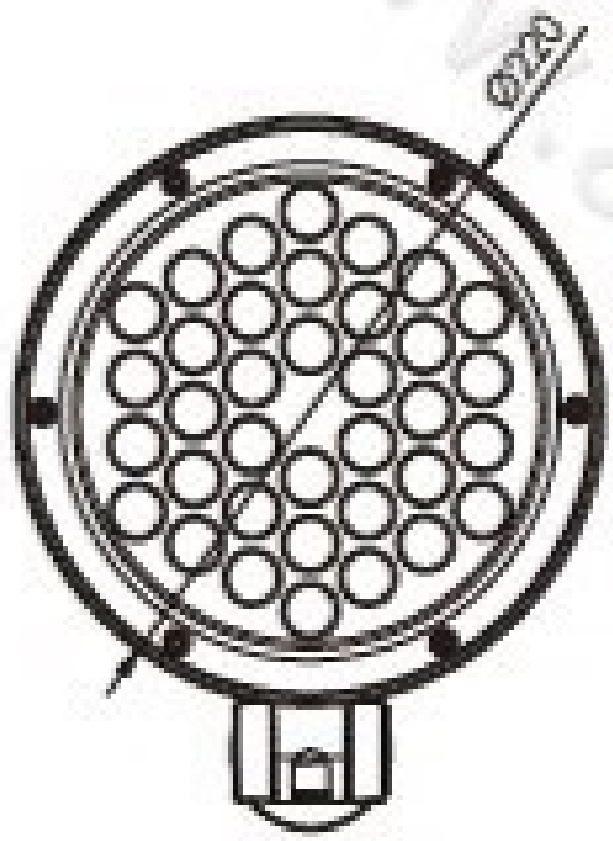



1102S

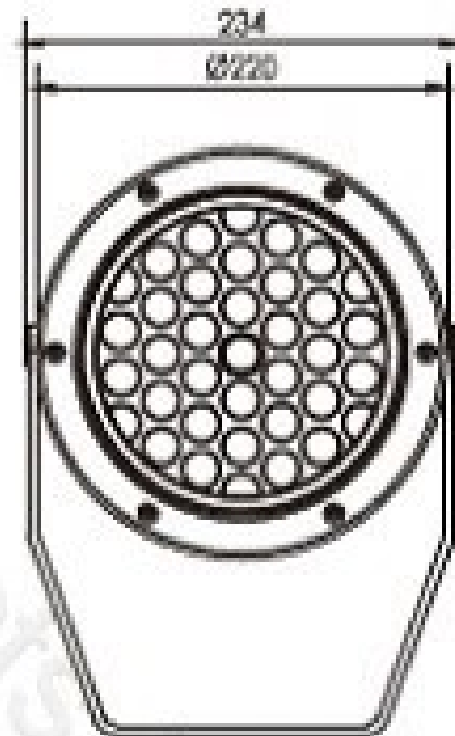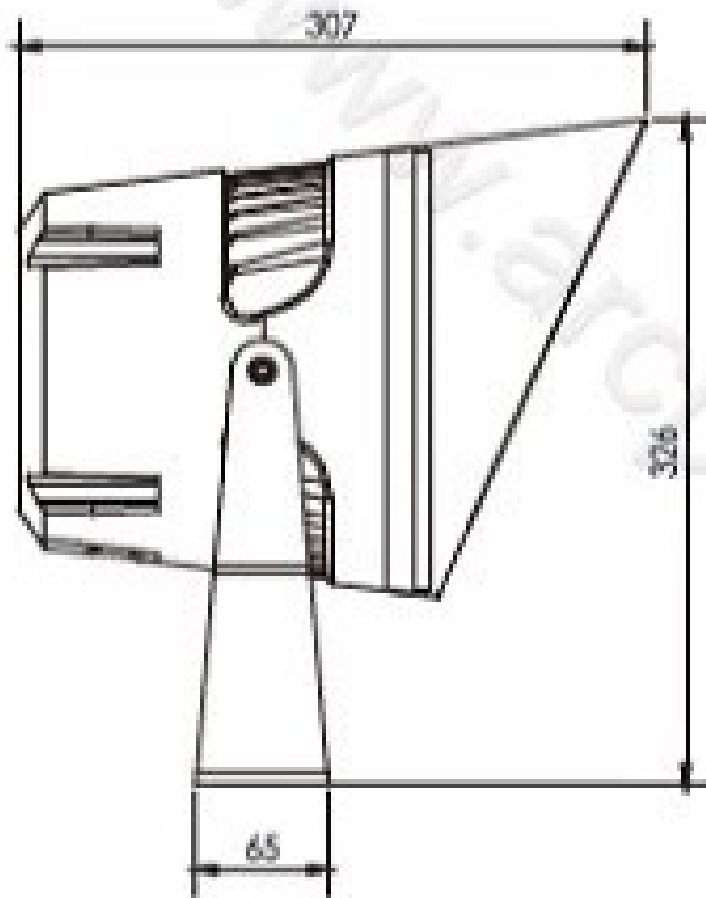

Flood Light Series

1102U







Specification

Product Code	.1102UD-36	1102UC-36	1102UB-36	.1102UC-24
Led Brand	CREE XP-G3	CREE	CREE	CREE
Led Quantity	36pcs	36pcs	36pcs	24pcs
Rared Power	105W	86W	60W	50W
Input Voltage	AC100-240V	DC24V/AC100-240V		DC36V/AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	RGB/Single	RGB/Single	RGB/Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			
Control Mode	CC	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

Distribution Curve Flux (SBC Case)

1102UC-36

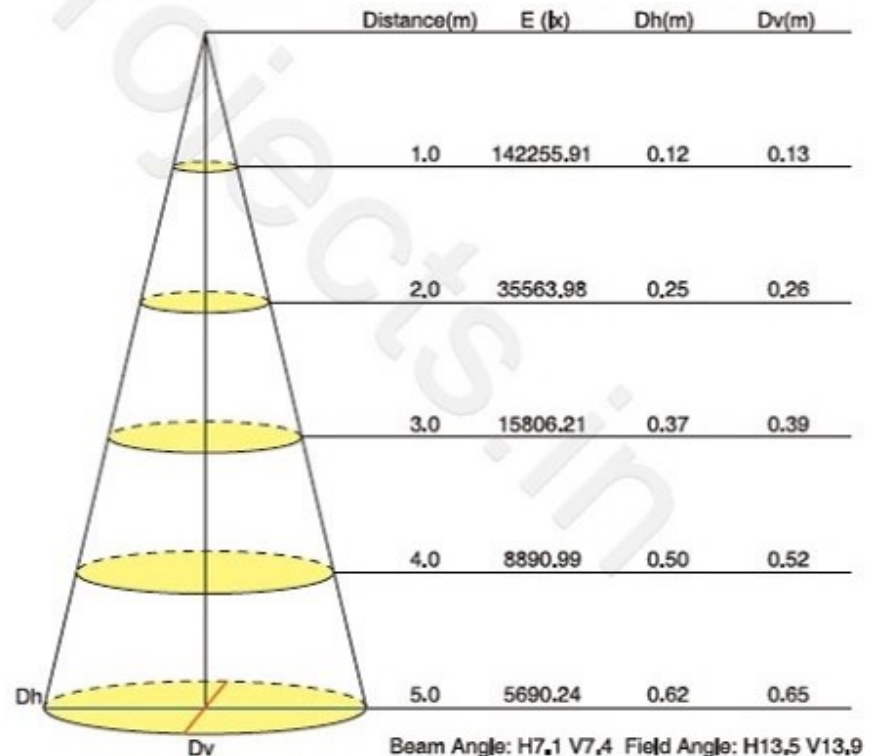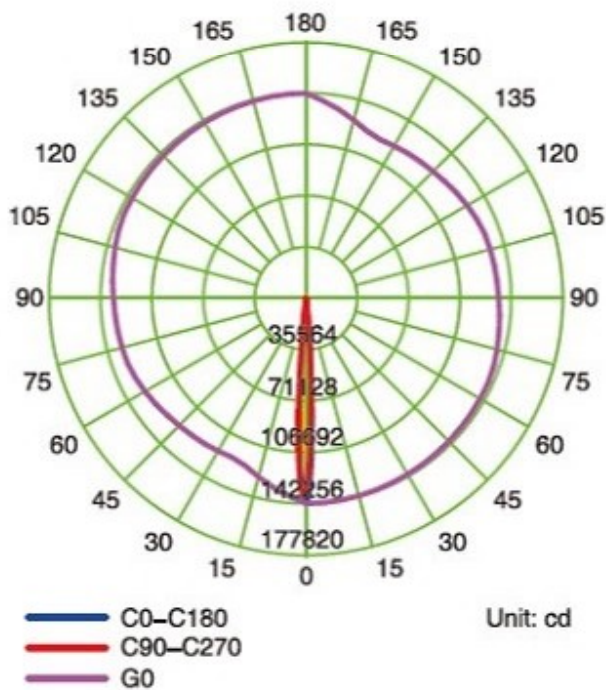

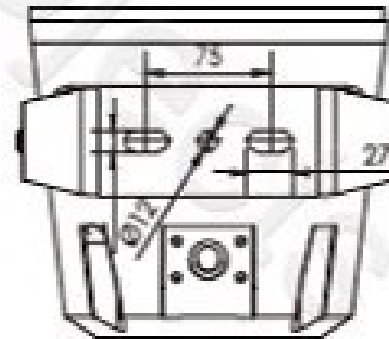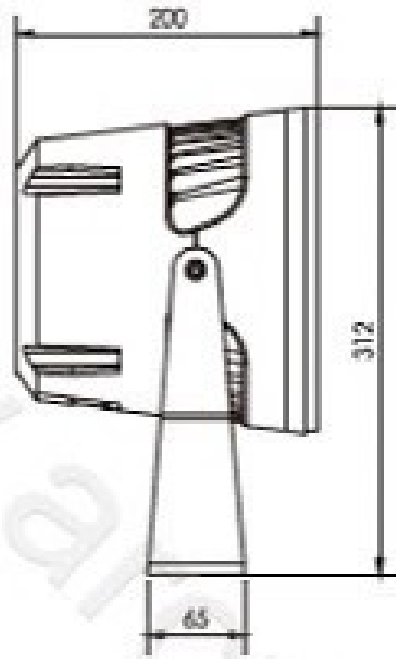

1102X



