


Specification

Product Code	1105FC-3	1105FB-3	1105FA-3	1105F-C10
LED Brand	CREE	CREE	CREE	CREE
LED Quantity	3pcs	3pcs	3pcs	1pc
Rated Power	8W	6W	3.5W	10W
Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	Single	Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			25°
Control Mode	CC	CC	CC	CC
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%


Distribution Curve Flux (SBC Case)

1105F-C10

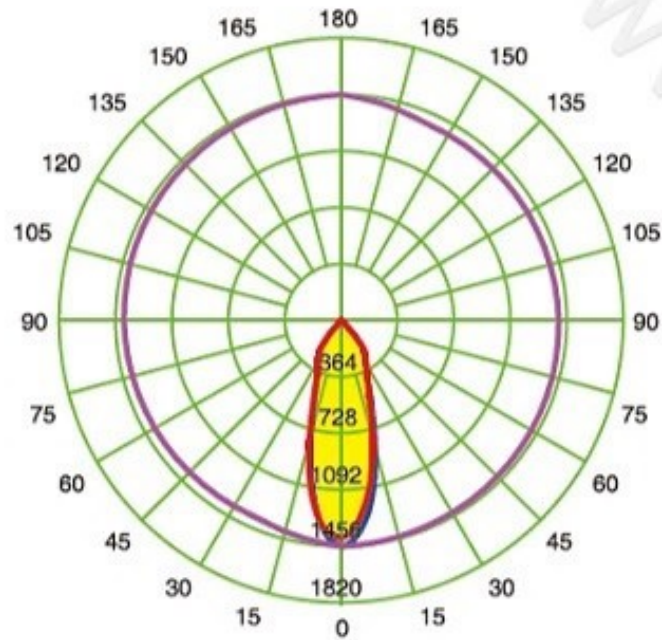

- C0-C180
- C90-C270
- G0




Unit: cd

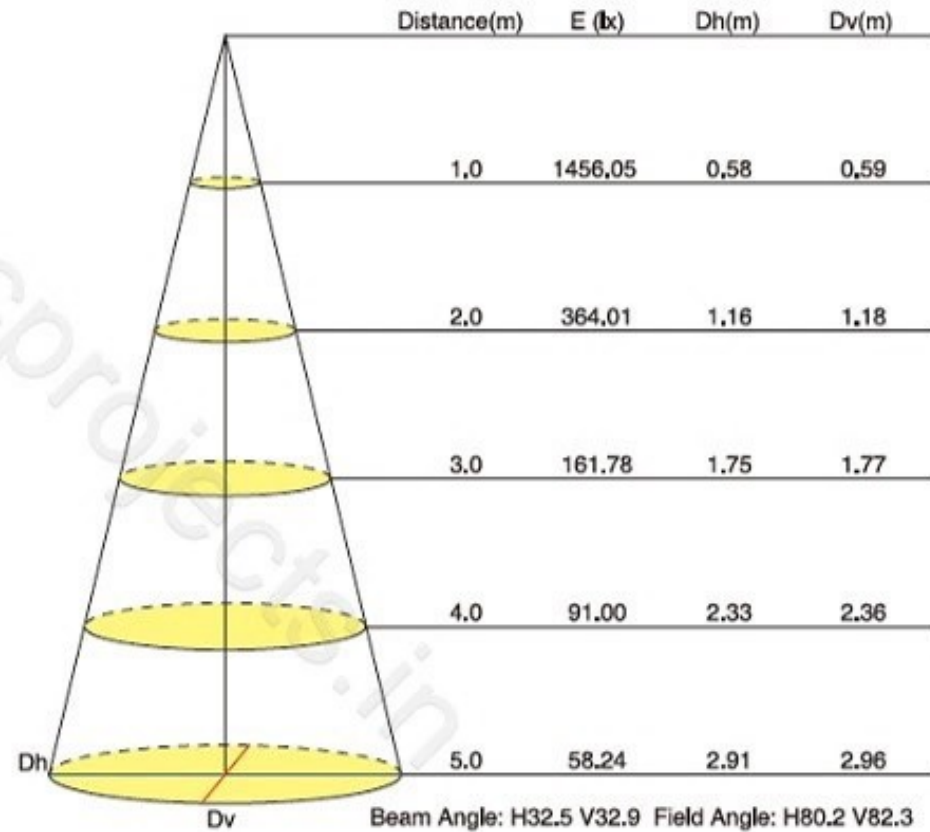

Flood Light Series

1105F



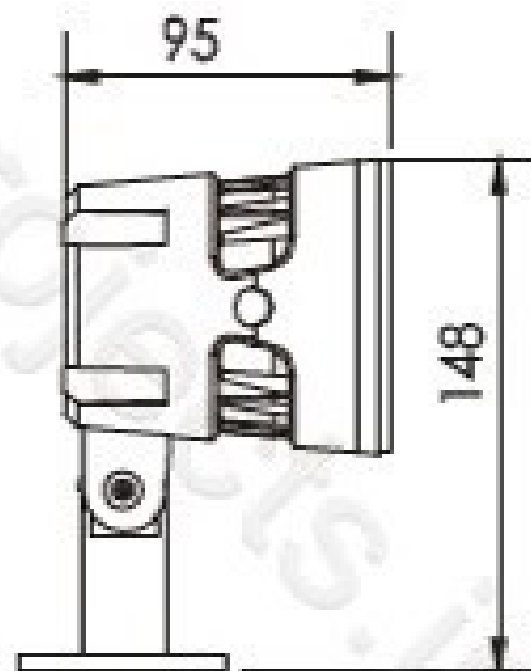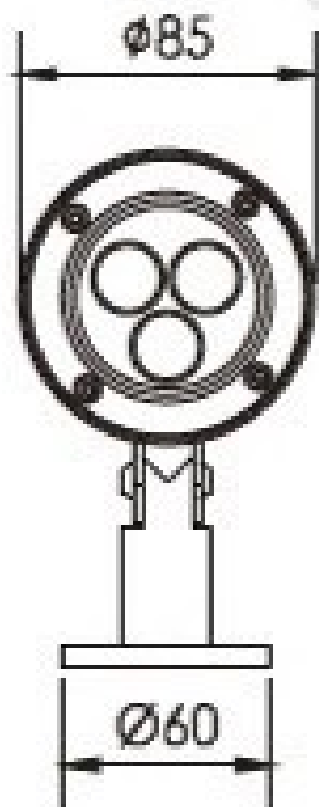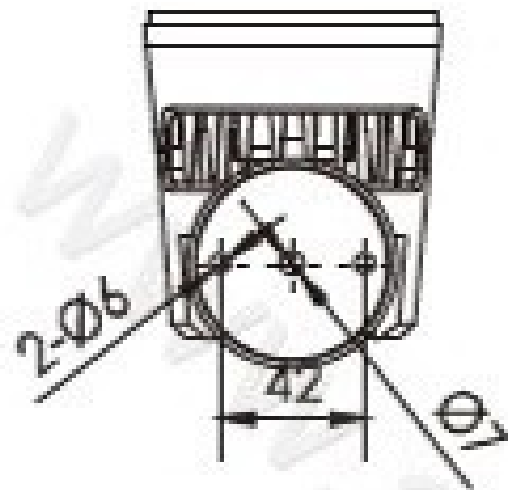

1105S




elects.in



Specification

Product Code	1105SC-3	1105SB-3	1105SA-3	1105S-C10
LED Brand	CREE	CREE	CREE	CREE
LED Quantity	3pcs	3pcs	3pcs	1pc
Rated Power	8W	6W	3.5W	10W
Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	Single	Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			25°
Control Mode	CC	CC	CC	CC
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Distribution Curve Flux (SBC Case)




1105S-C10

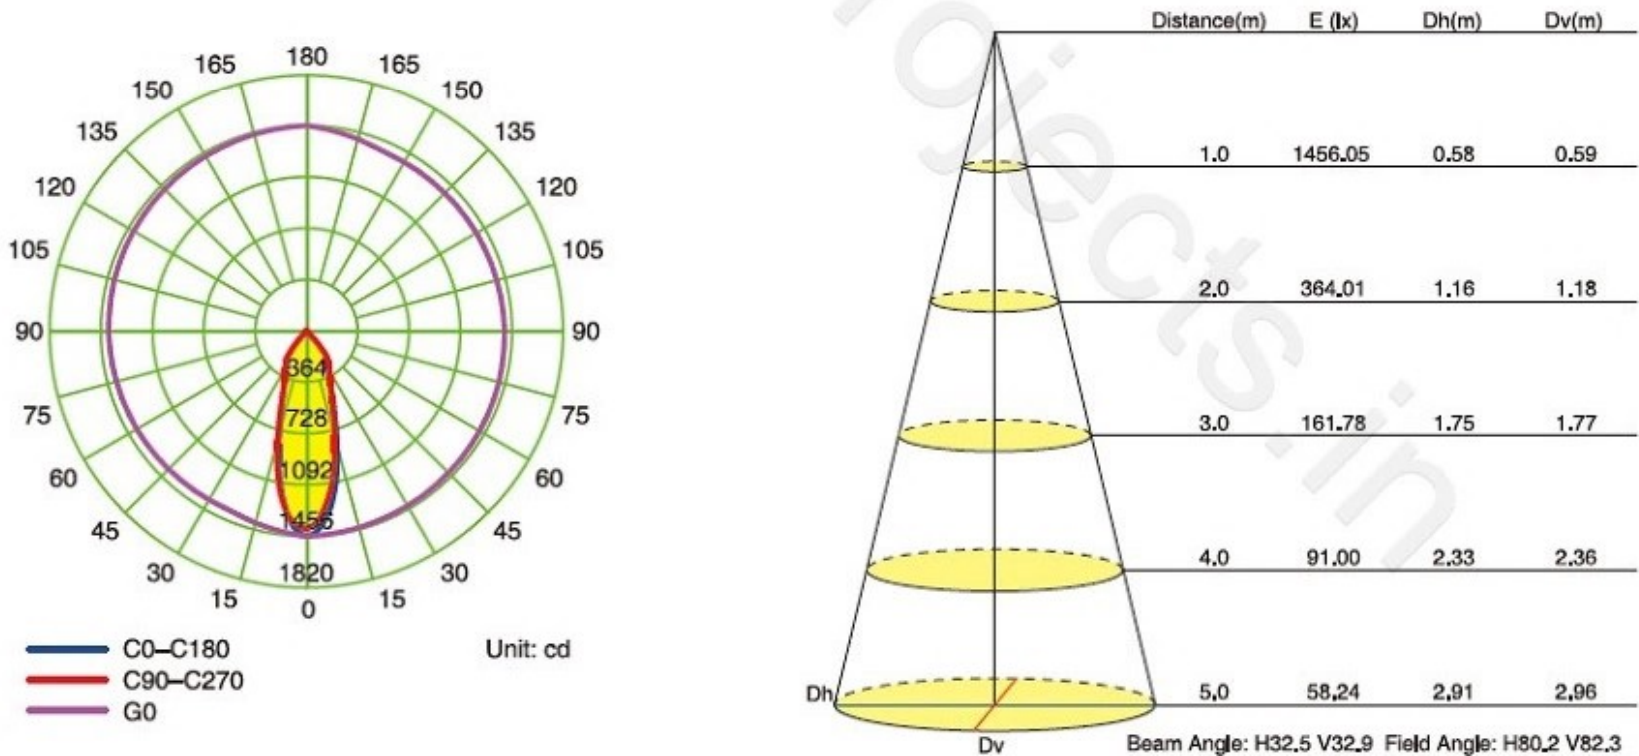

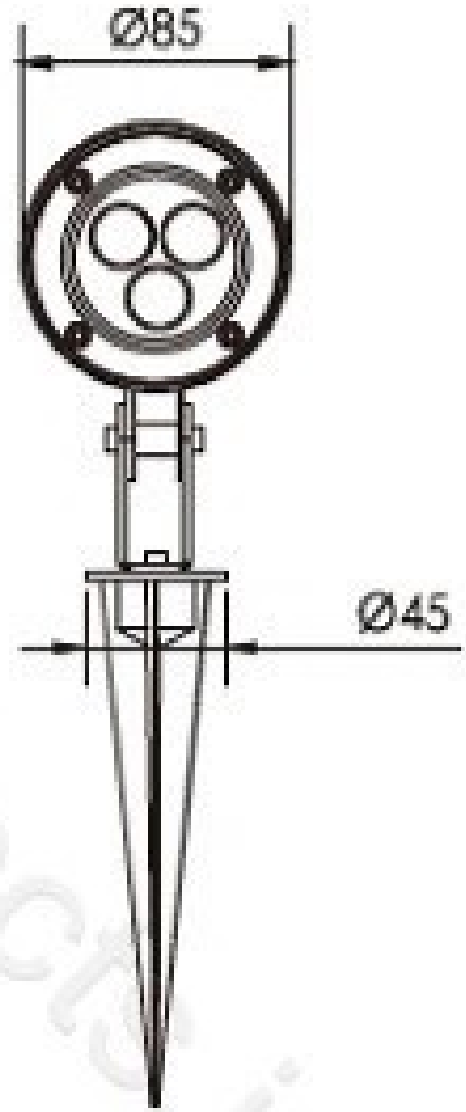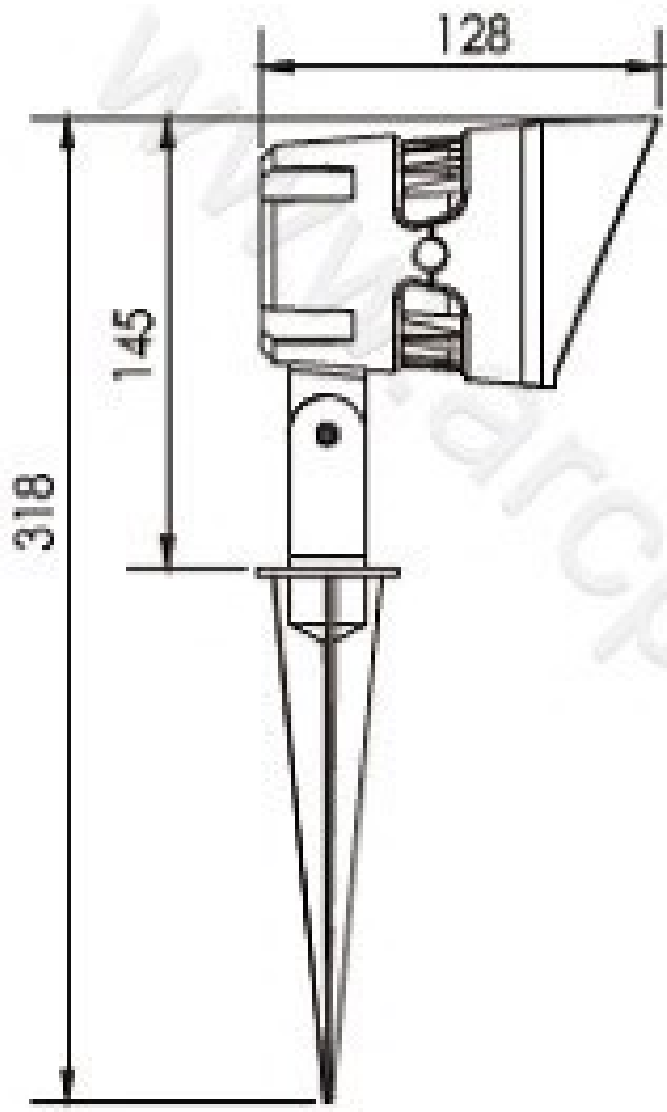

Flood Light Series
1105U



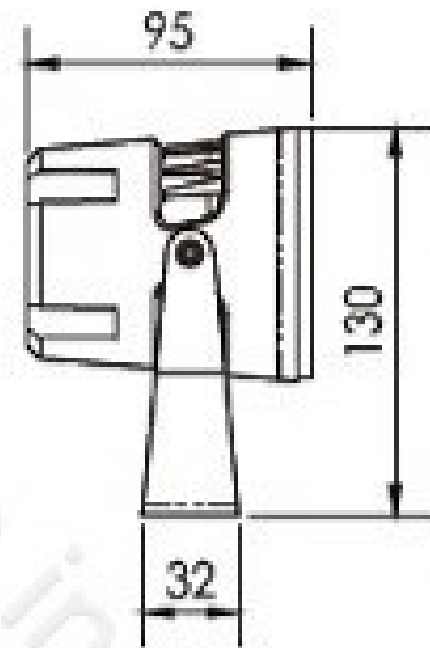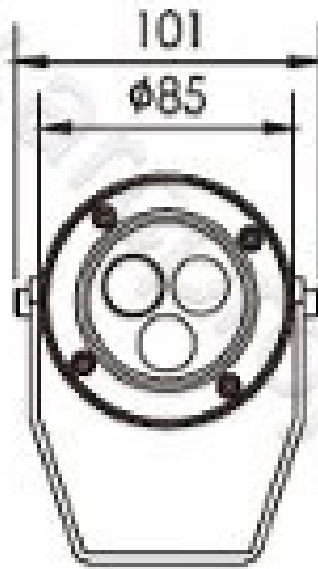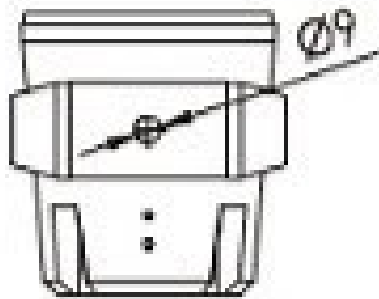


Specification

Product Code	1105UC-3	1105UB-3	1105UA-3	1105U-C10
LED Brand	CREE	CREE	CREE	CREE
LED Quantity	3pcs	3pcs	3pcs	1pc
Rated Power	8W	6W	3,5W	10W
Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	RGB/Single	RGB/Single	RGB/Single	Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			25°
Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%


Distribution Curve Flux (SBC Case)

1105UB-3

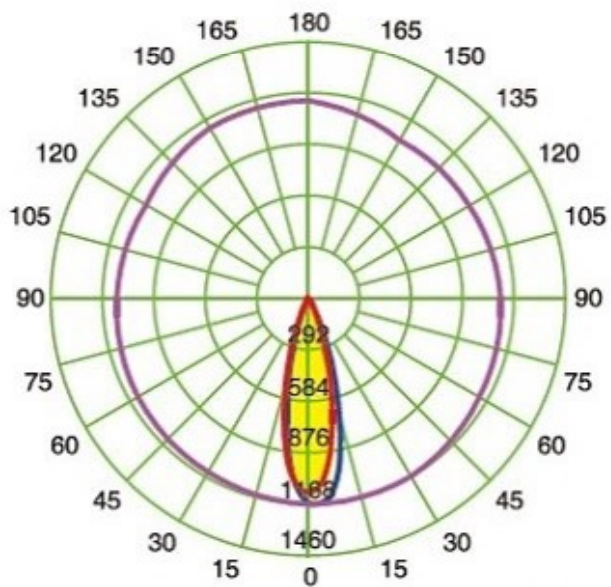

- C0-C180
- C90-C270
- G2

Unit: cd

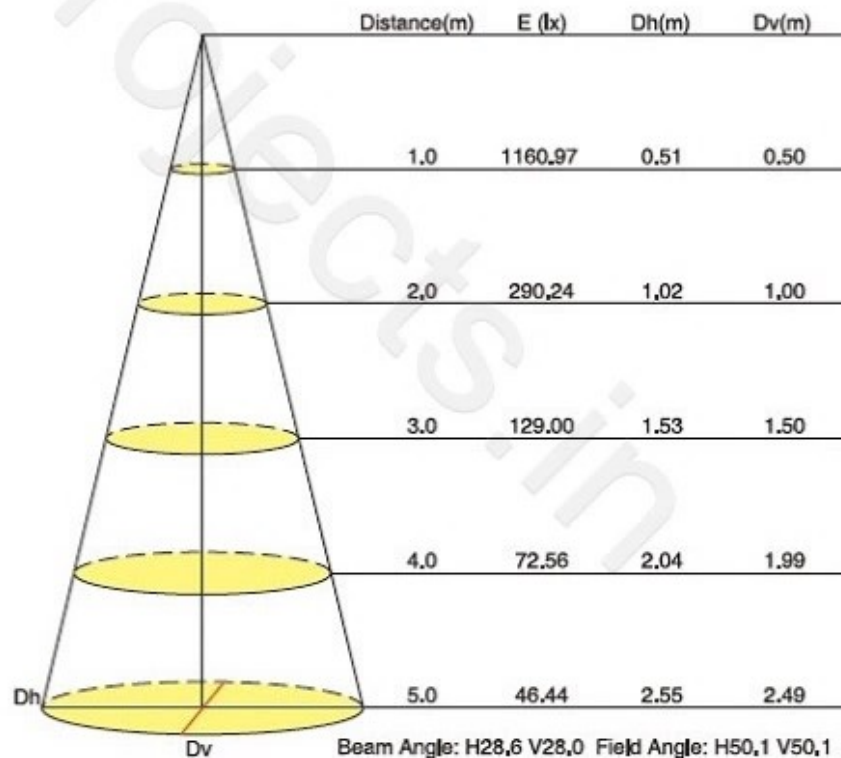

Beam Angle: H28,6 V28,0 Field Angle: H50,1 V50,1