




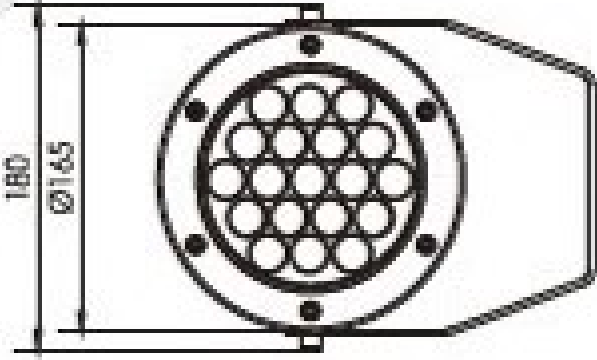

1103G

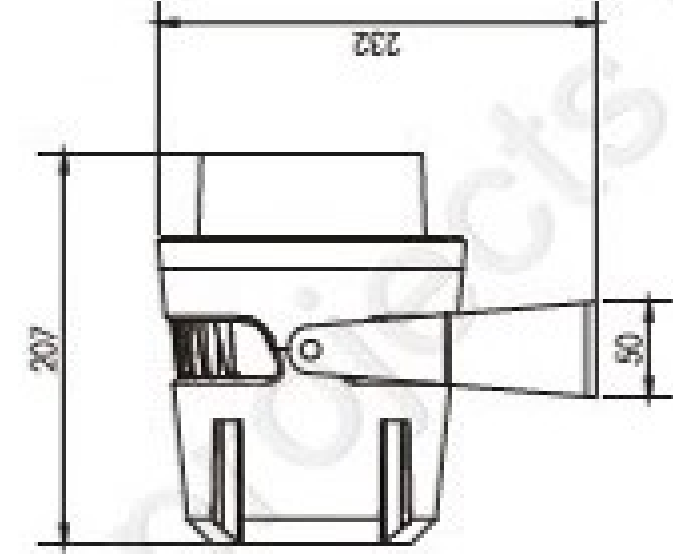


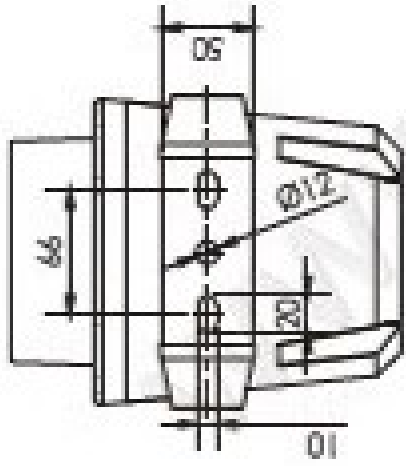

SL1103M



1103M

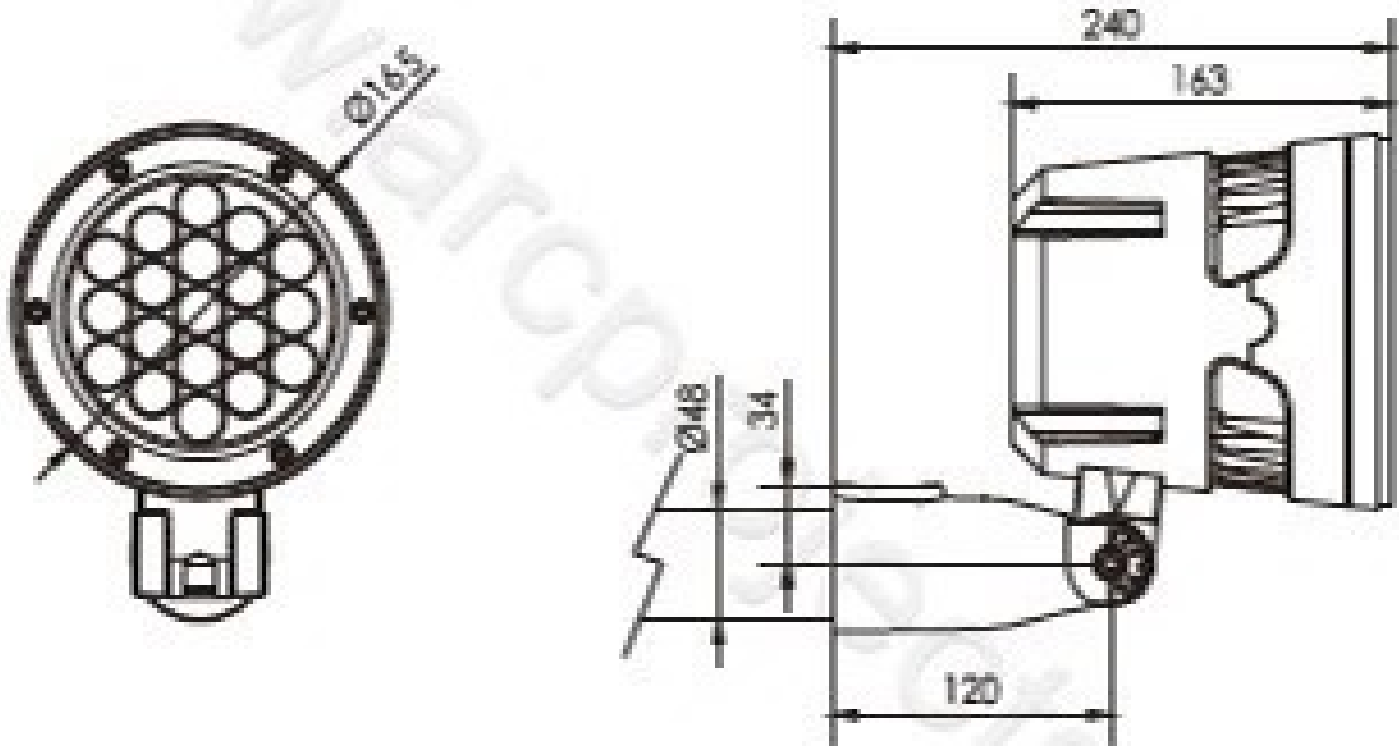

1103S




Specification


Product Code	1103SC-18	1103SB-18	1103SA-18
LED Brand	CREE XP-G3	CREE	CREE
LED Quantity	18pcs	18pcs	18pcs
Rated Power	45W	30W	21W
Input Voltage	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
Color	Single	RGB/Single	RGB/Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°		
Control Mode	CC	DMX512/CC	DMX512/CC
Life	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66
Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%



Distribution Curve Flux (SBC Case)

1103SB-18

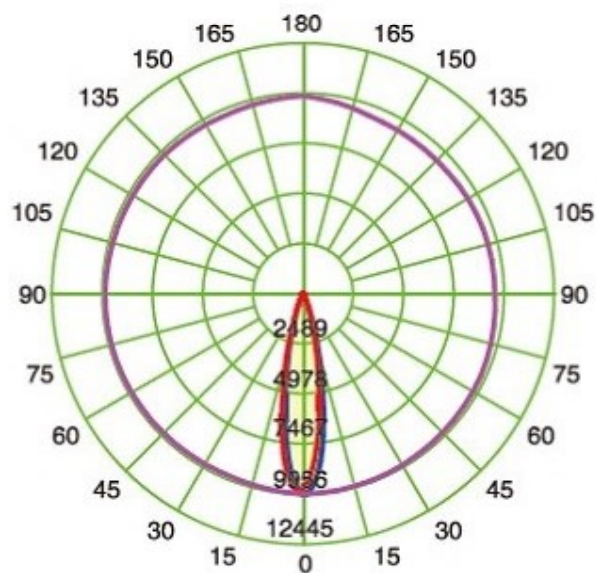

- C0-C180
- C90-C270
- G1

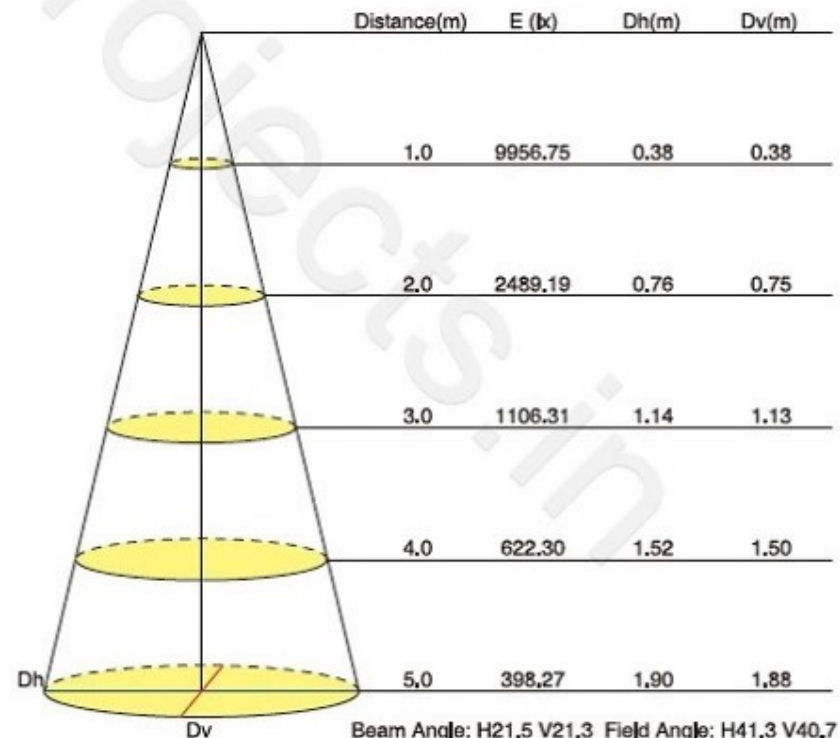

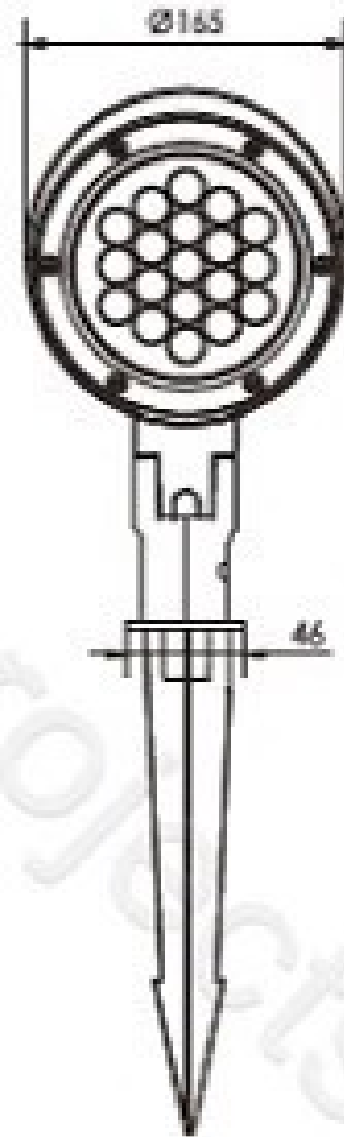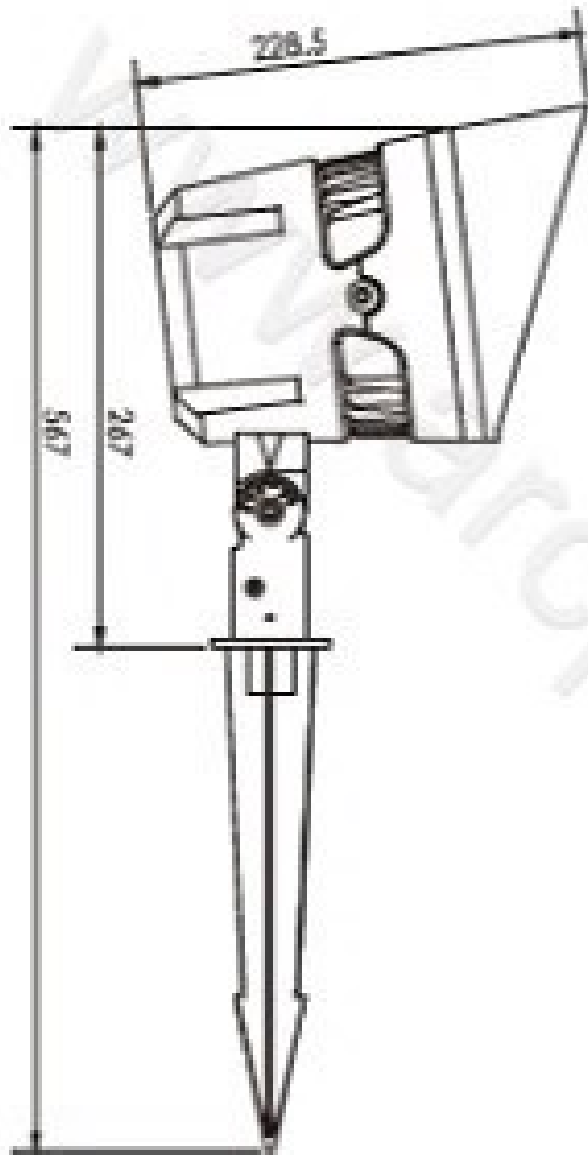

Flood Light Series

1103U








Specification

Product Code	1103UC-18	1103UB-18	1103UA-18
LED品牌 LED Brand	CREE XP-G3	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs	18pcs
额定功率 Rated Power	45W	30W	21W
输入电压 Input Voltage	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	RGB/Single	RGB/Single
发光角度 Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°		
控制方式 Control Mode	CC	DMX512/CC	DMX512/CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%

Distribution Curve Flux (SBC Case)


1103UB-18

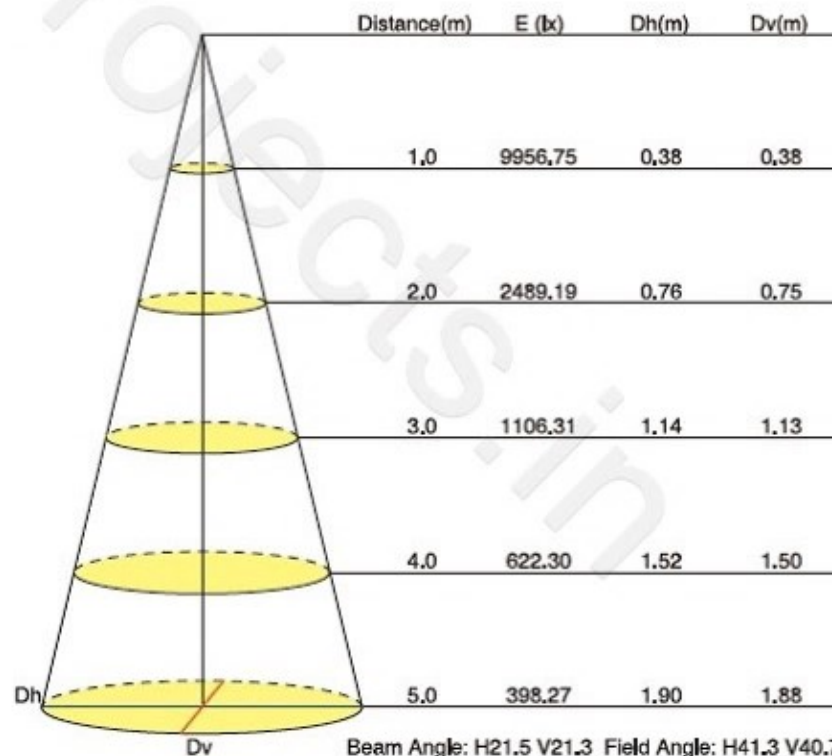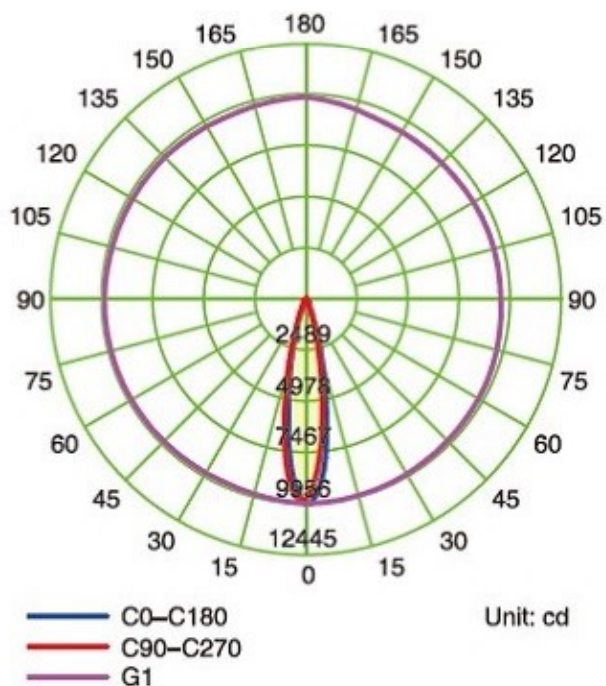

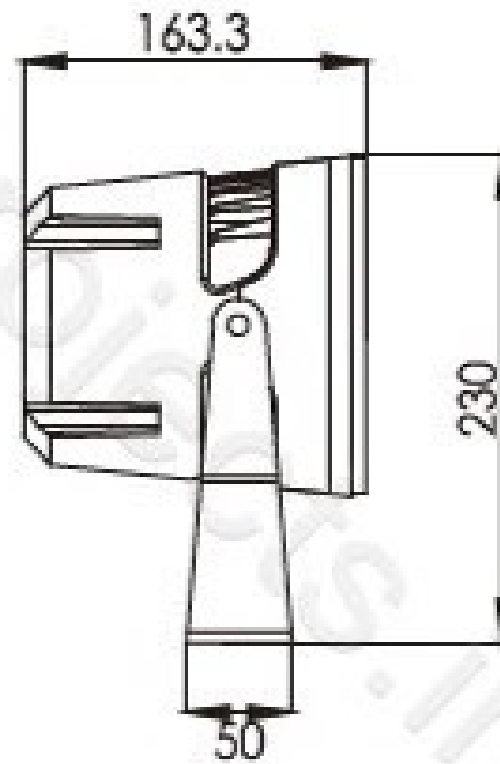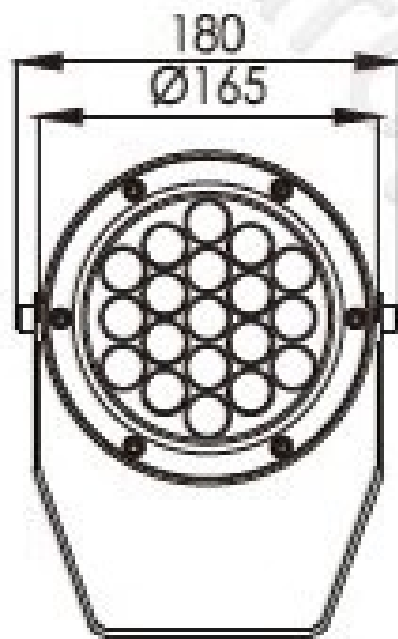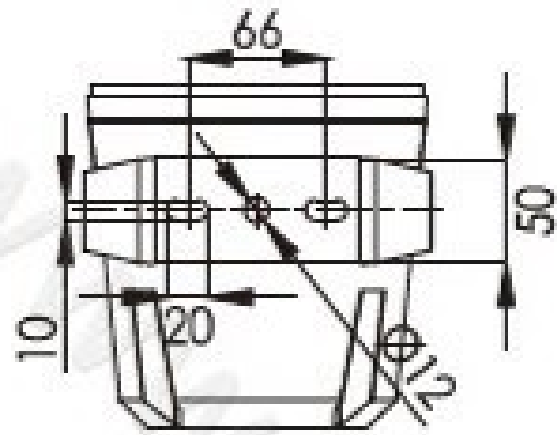




1103X

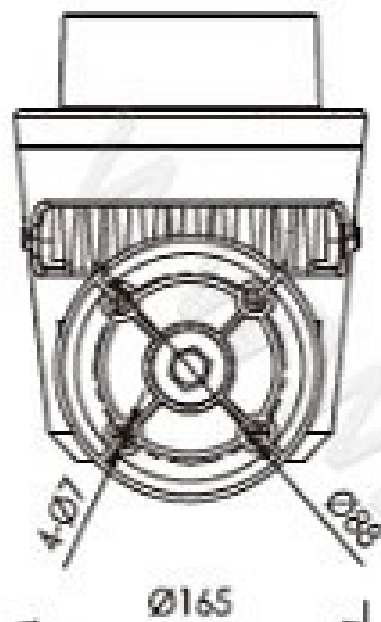

$\text{Ø}165$

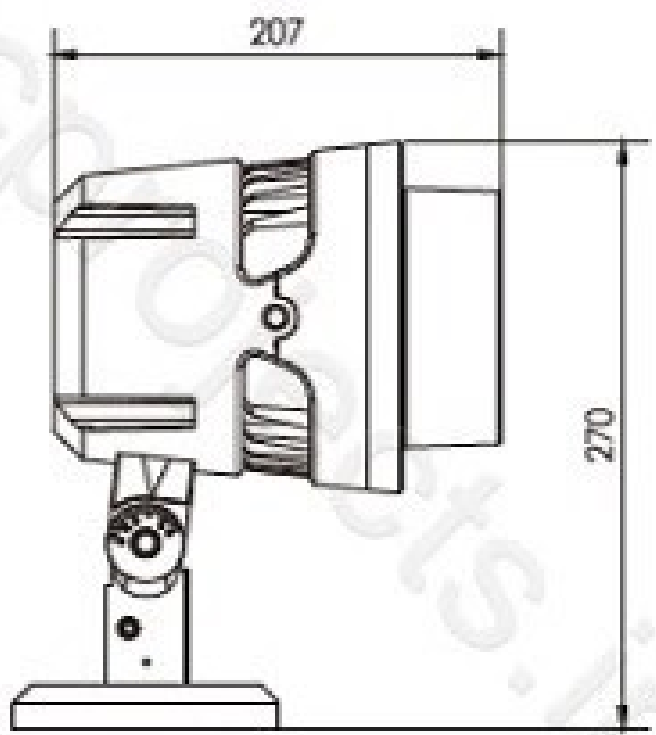

1103F




Specification

Product Code	1103FC-18	1103FB-18	1103FA-18
LED Brand	CREE XP-G3	CREE	CREE
LED Quantity	18pcs	18pcs	18pcs
Rated Power	45W	30W	21W
Input Voltage	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
Color	Single	RGB/Single	RGB/Single
Beam Angle	5° 8° 12.5° 20° 30° 45° 60° 15X30° 10X60°		
Control Mode	CC	CC	CC
Life	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66
Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

Distribution Curve Flux (SBC Case)

1103FB-18

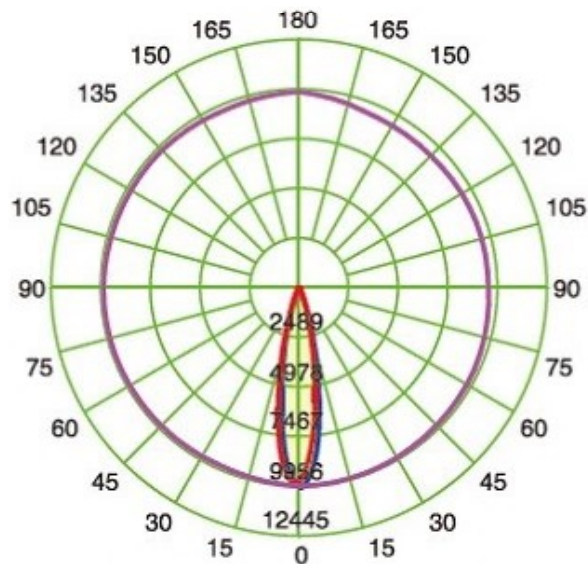

- C0-C180
- C90-C270
- G1

